

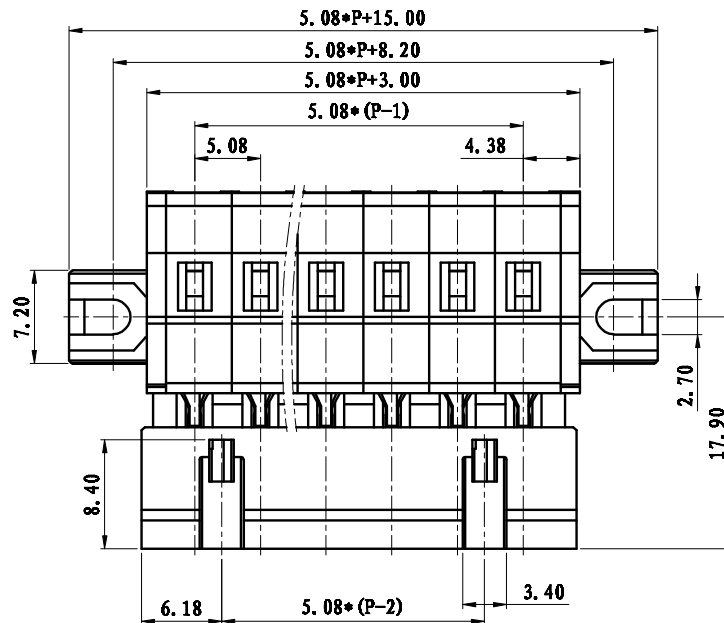


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

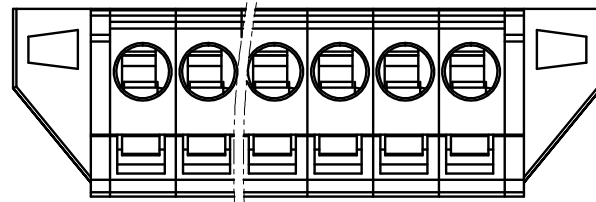

NOTES:
 Pitch : 5.08mm
 Rated Voltage : 300 V
 Rated Current : 15 A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 500MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃
 Wire range : 22~ 14AWG

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 22~ 14AWG

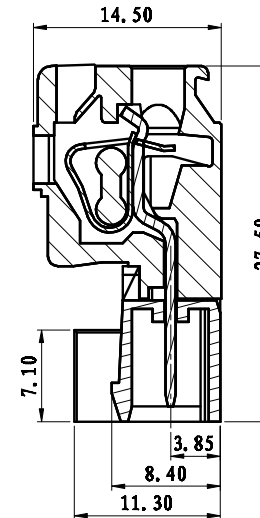

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	— /	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	— /	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LSC10-方针	1062B0001AV	P	黄铜	镀雾锡
5	LSC1-弹片	F2A0DLSLC1BV	P	不锈钢	
4	LSZ10B-5.08-主体	1087A0YXXAV	1	PA66	
3	LSC10M-5.08-盖板2	1064C0Y01AV	1	PA66	
2	LSC10M-5.08-盖板1	1063C0Y01AV	1	PA66	
1	LSC10-5.08-本体	1062A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	12/08/15	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1087003
				TITLE	LSC10BM-5.08-IXP-1Y-00A
					LSC10BM-5.08-成品

上海联捷电气有限公司
 Shanghai Elinker Electric CO.,LTD