
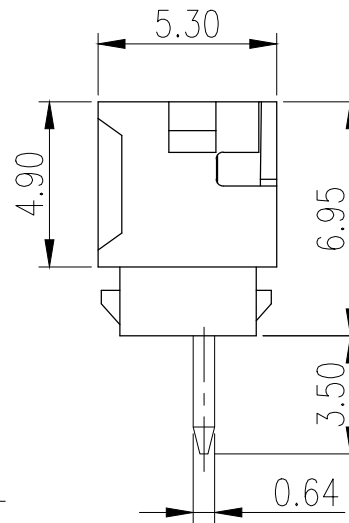
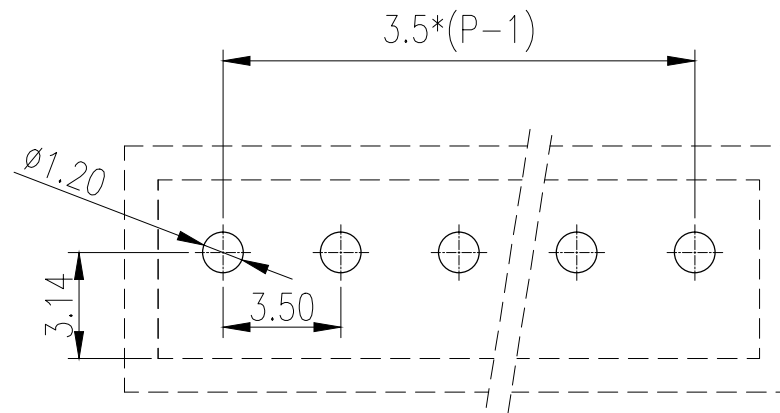


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

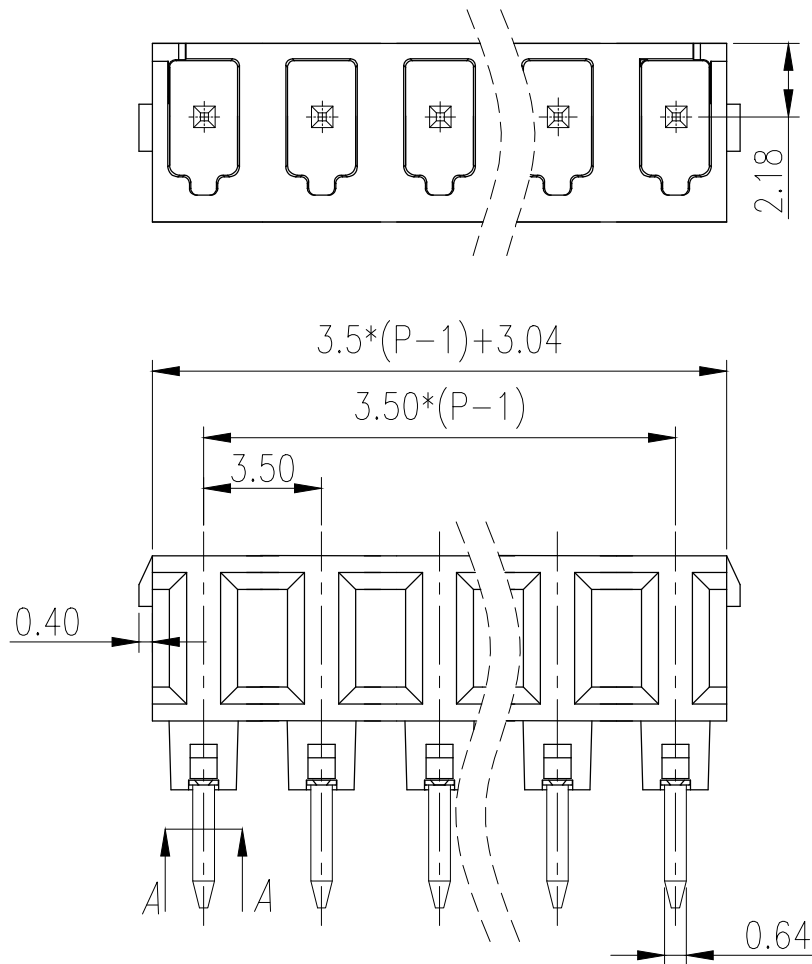


NOTES:

1. Voltage Rating: 300V, Current Rating: 6A
2. PITCH: 3.5mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40℃ ~ +105℃
5. Suitable Electric Wire: 26-20AWG

技术要求:





1. 额定电压: 300V, 额定电流: 6A
2. 间距: 3.5mm
3. 耐压值: AC 2000V/min
4. 使用条件: -40℃ ~ +105℃
5. 适用线规: 26-20AWG

	pitch dimension			Nominal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



2	LZ8-2.54直针-1	1008B0001AV-1	P	黄铜	镀锡
1	LZ8X-3.5主体	1198A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	陈明珠	DATE 23/12/26	UNITS mm	THIRD ANGLE PROJECTION	
CHK.	张华丰	DATE 23/12/26	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1168001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ8XV-3.5-XXP-1Y-00A LZ8XV-3.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

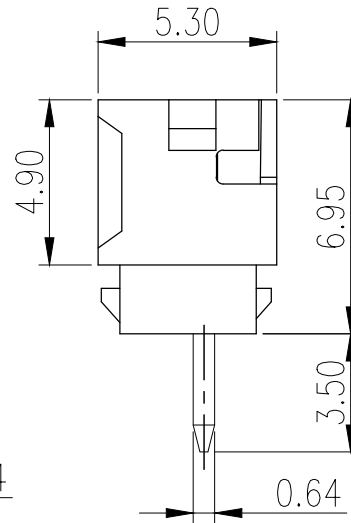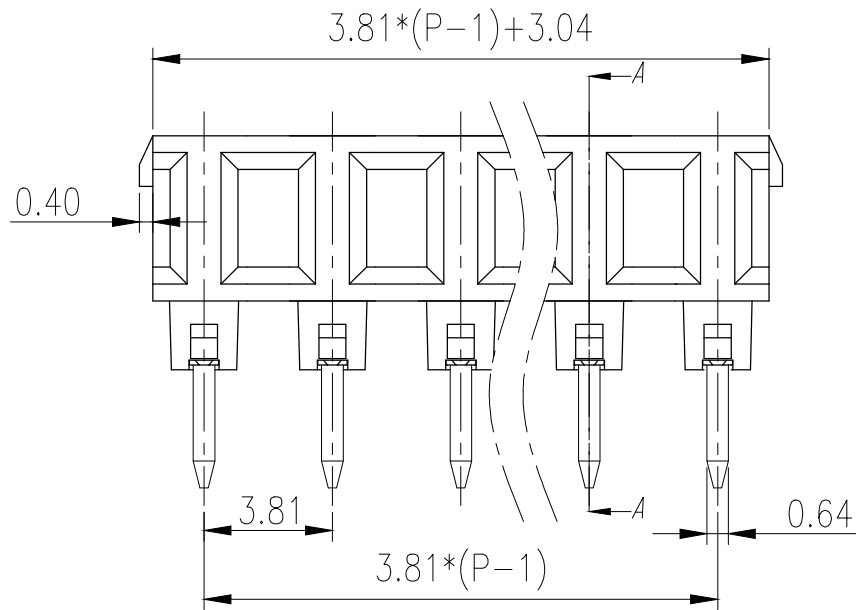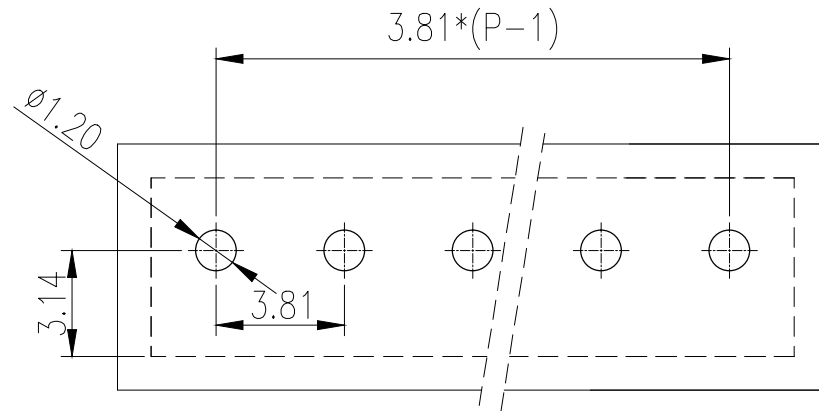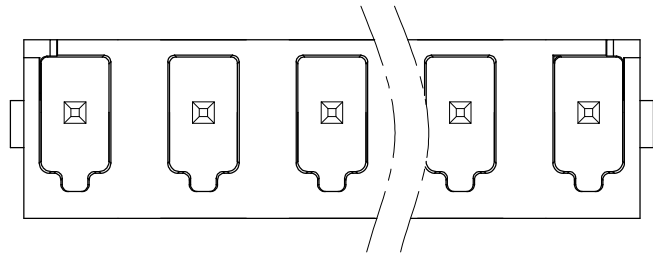


NOTES:

1. Voltage Rating: 300V, Current Rating: 6A
2. PITCH: 3.81mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range:-40℃ ~+105℃
5. Suitable Electric Wire: 26-20AWG

技术要求:

1. 额定电压: 300V, 额定电流: 6A
2. 间距: 3.81mm
3. 耐电压值: AC 2000V/min
4. 使用条件: -40℃ ~+105℃
5. 适用线规: 26-20AWG

	pitch dimension			Naminal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		∠ C
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ8-2.54直针	1003B0004AV	P	黄铜	镀锡
1	LZ8X-3.81主体	1199A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 24/07/04	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1:1		
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ8XV-3.81-XXP-1Y-00A
					LZ8XV-3.81-成品