REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

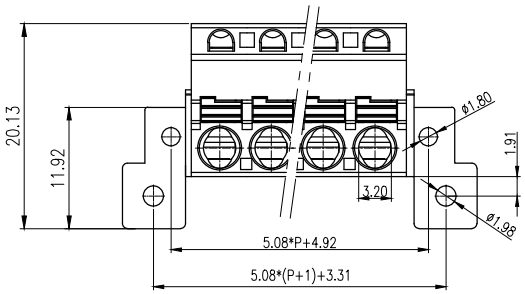

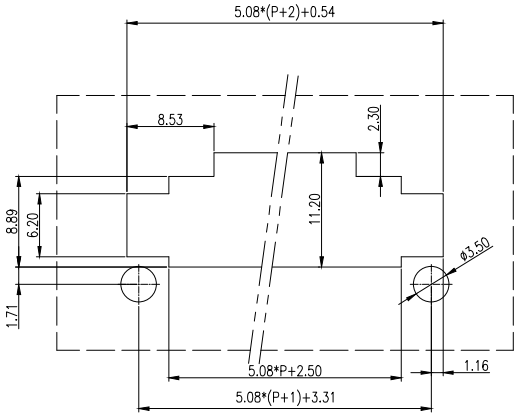

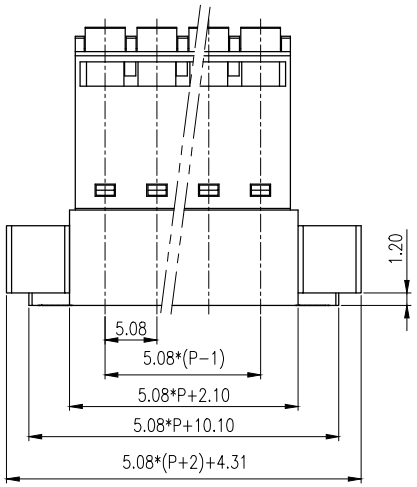

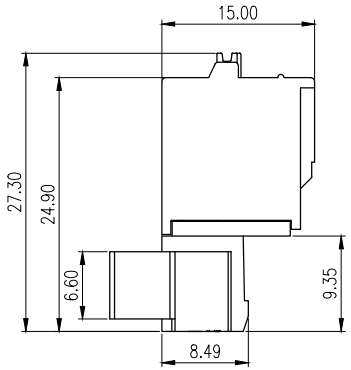

NOTES1:
Pitch : 5.08mm
Voltage Rating: 300V,
Current Rating: 10A
Suitable Electric Wire: 26-12AWG
Withstand Voltage :
AC2500V for 1 minute
Using Temperature Range :
- 40℃ ~ + 105℃

技术要求:
间距: 5.08mm
额定电压: 300V
额定电流: 10A
适用线规: 26~12AWG
耐电压值: AC2500V/min
使用条件: -40℃~+105℃



	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	— / ▱ / ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
8	LG636（一字平头螺丝）	SP0YA306601V	2	碳钢	三价铬钝化彩锌
7	LZ1HM-7.62耳朵螺母	SM00B300000V	2	黄铜	
6	LZ1-耳朵螺母	SM00B250000V	2	黄铜	
5	LC60-5.08五金件	2083B0001AV	P	磷青铜	镀锡
4	LC6-5.08-弹片	F2A0DLC658BV	P	不锈钢	
3	LC6-5.08-按钮	1020D0Y01AV	P	POM	
2	LC60MGC2-5.08-盖板	2099C0YXXAV	1	PA66-V0	
1	LC6-5.08-本体	1020A0YXXAV	1	PA66-V0	

DES.	CMZ	DATE	25/05/22	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1

THIRD ANGLE PROJECTION
SHEET 1 of 1
DWG NO. SP-2-208302
REV: V0

上海联捷电气有限公司
Shanghai Elinker Electric C O.,LTD

TITLE: LC60MGC2-5.08-XXP-1Y-00A
LC60MGC2-5.08-成品